



Barad Atlanta Trading LLC  
Sharjah UAE  
www.albaraduae.com



# Technical Data

PROPERTY	Standard	Units	Standard	Description
Light transmittance	ASTM D 1003	%	85	Visible light rate transmitted through the material.
Shore A hardness	EN ISO 868	Sh A	80	Index based on a flat indenter's penetration depth. Scale from 0 (Soft) to 100 (Hard).
Tearing resistance	DIN 53515	N/mm	50	Minimum tensile stress required to tear a pre-slit sample.
Tensile strength at break	ASTM D 638 EN ISO 527	N/mm <sup>2</sup>	16	Maximum tensile stress that a material can be subjected to before break.
Elongation at break		%	340	Elongation of the specimen at the break point under tensile stress.
Residual elong. (after break)		%	68	Permanent elongation of the specimen measured after rupture in a tensile test.
Thermal conductivity	ASTM C 177	W/m.K	0,16	Ability to conduct heat. The Lower it is, the more insulation.
Cold bend brittle temp.	ISO 8570	°C	-35	Temperature at which the specimen break under torsion stress. Brittle point (CLASH & BERG).
Min. usage temp.	EN 1876	°C	-15	Temperature range where material keep its mechanical properties (flexibility).
Max. usage temp.		°C	+50	
Vicat softening temp.	EN ISO 306	°C	50	Temperature at which the specimen is penetrated to a depth of 1 mm by a 1 kg flat indenter of 1 sq. mm.
Specific heat capacity	ISO 11357	kJ/kg.K	1,6	Heat energy required to increase the temperature of one kilogram of the material by one degree Celsius.
Sound reduction	DIN 52210	dB	>35	Average sound level (freq. 0,1 to 3,2 kHz) decreased by a 1,76 sq.m. and 5 mm thick PVC curtain.
Reaction to fire	EN 13501-1:2007	Class	-	Standard classifications of material self-extinguishing and resistance to combustion.
UV/IR filter	EN 1598 & ISO 25980	-	-	Ability to filter welding rays allowing the use of this material as a welding protection screen.
UV resistance	ISO 4892	-	Yes	Ability to resist to UV (Sun, welding arc).
Surface resistivity	ASTM D257	$10^{10} \Omega/\square$	30	Material surface electric resistivity measured with a 100 V direct voltage.
Water absorption	EN ISO 62	%	-0,2	Material mass variation after exposure to humid conditions. (<0 if released / >0 if absorbed)
Anti-insect	-	-	Yes	Special ability to keep insects away.(Food processing plants, tropical regions)
Density	ASTM D 792	g/cm <sup>3</sup>	1,22	Mass per unit volume.

www.albaraduae.com [in](#) [f](#) [whatsapp](#)

# FIGHT AGAINST MOSQUITO BORNE DISEASES

## DENGUE (VIRUS)

- ✓ 50 to 100 million infections per year
- ✓ 2.1 million of severe form (hemorrhagic fever and shock syndrome)
- ✓ 25,000 deaths per year compound

## MALARIA (BLOOD PARASITIC DISEASE)

- ✓ 220 million cases of malaria per year
- ✓ 660,000 deaths per year
- ✓ 85% of the victims are children under 5

## YELLOW FEVER (VIRUS)

- ✓ 200,000 illnesses per year
- ✓ 30,000 deaths worldwide each year
- ✓ 44 endemic countries in Africa and Latin America, with combined population over 900 million, are at risk

## ZIKA (VIRUS)

- ✓ More than 5 millions cases (increasing everyday)
- ✓ Risk of severe congenital malformation of new born's



*Aedes Aegypti*



*Anopheles*

## THE SOLUTION : STOP-INSECT DOORS AND PARTITIONS



## STOP-INSECT

In order to fight insect nuisance, Extruflex has incorporated an anti-insect agent in its soft vinyl compound and has created the **STOP-INSECT**.

The **STOP-INSECT** vinyl technology is efficient in many environments:

Houses, shops, warehouses, schools, supermarkets, public areas, hospitals, etc.

**STOP-INSECT** vinyl will also act to protect against ants, spiders, scorpions, mites, ticks, fleas or cockroaches.

The efficiency of **STOP-INSECT** has been demonstrated by a study conducted over 12 months by an independent laboratory.

# SAFETY AND HUMAN CONTACT

## SKIN CONTACT: NOT TOXIC.

**423 Agent** is not toxic for human skin.

Tests were conducting using MTT method on Keratinocytes.



Report number FSR-IPL 120404 made by Institut Pasteur de Lille, France, could be provided upon request.

Report number FSR-IPL 120603 made by Institut Pasteur de Lille, France, could be provided upon request.

## TECHNICAL DATA

**designation:** 423

**specific features:** anti-mosquito

**color:** transparent rusty orange

**packaging:** clear protection film

**marking:** STOP-INSECT

EXP 11 2014




ARTICLE CODE	WIDTH (MM)	THICKNESS (MM)	LENGTH (M)	PALLETIZATION
L423B0150020050	150	2	50	20
L423B0200020050	200	2	50	40
L423B0300030050	300	3	50	35
L423R0203018050	200	2 (RIBBED)	50	36
L423R0305028050	300	3 (RIBBED)	50	24
P423B1500070020	1500	7	20	4
P423B1500100020	1500	10	20	2

Other sizes could be provided upon request.



# APPLICATIONS

Houses, shops, warehouses, schools, supermarkets, public areas, hospitals, etc.

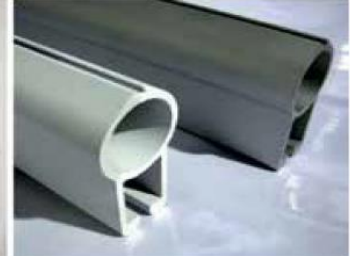

# FLEXIBLE VINYL REINFORCES YOUR BUILDING

**Fireproofed, reinforced, anti-static, anti-UV, antibacterial –flexible vinyl is suited to your needs.**

## /// FIRE RETARDANT FLEXIBLE VINYL

Flexible vinyl is a naturally self-extinguishing material (which extinguishes at the withdrawal of the flame).

Its fire resistance can be increased to respond to the various international requirements demanded in construction and building: EUROCLASS classification (E, D, C or B), M classification (M1 to M4), B classification (B1 to B2), V classification (V0 to V2), EN1598, ISO 25890, etc.



**LNE**

Le progrès, une passion à partager



Our products are certified by specialised laboratories.



EUROCLASS testing booth

## /// SOLIDITY/RESISTANCE OF FLEXIBLE VINYL

Resistance to elongation and tearing can be reinforced by adding a polyester web inside the material to meet the most demanding specifications (superstructures, large dimensions, stretched installations, large charges).

- ✓ Better tear resistance
- ✓ Better dimensional stability under stress

**EXTRUFLEX® Exclusivity**



## /// CHARACTERISTICS POSSIBLE WITH FLEXIBLE VINYL

- ✓ Strips: from 75 mm to 2.2 m
- ✓ Thickness: from 1 to 12 mm
- ✓ Clear or opaque
- ✓ Operating temperature: -60°C to +50°C
- ✓ Antistatic, UV-resistant, printable surface, easy gluing





# APPLICATIONS

Fireproofed, reinforced, anti-static, anti-UV, antibacterial  
Flexible vinyl is suited to your needs.




Barad Atlanta Trading LLC, Sharjah UAE

## /// EXTRUFLEX® CREATIONS



Flexible vinyl dome - Sky Dome stadium  
Seoul, South Korea

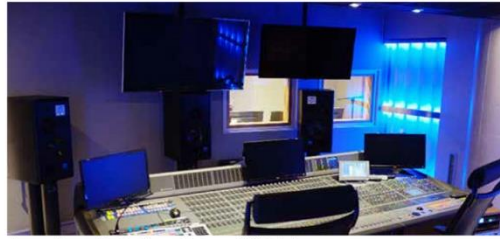

Acoustic optimisation - France Télévision  
Paris, France



Acoustic optimisation - GA Record Studio  
Maison Alfort, France



Partitions and doors - «Le Millénaire» shopping centre  
Aubervilliers, France



Phonic insulation - Bristol Hotel  
Paris, France



Energy optimisation - Vodaphone Datacentre  
France



Doors, partitions and gantries - Airports of Rome (Italy) and  
Madrid (Spain)



Phonic and thermal partitions



Technical rooms



Double swinging doors



Automatic doors



Doors with strips



Welding


# FLEXIBLE VINYL INSULATES YOUR BUILDING

Flexible and transparent, soft vinyl is an excellent thermal and phonic insulator. Such qualities, which are rarely combined in materials like glass, wood, metal and other thermoplastics, make flexible vinyl a choice material.

## /// A BARRIER TO REDUCE NOISE PROPAGATION

The material behaves like a soft viscoelastic mass that can absorb sound waves and dissipate its energy in the form of micro-heat by a viscous amortisation phenomenon. This property lets flexible vinyl absorb all sound waves -in particular low frequencies- better than other materials.

- ✓ An average reduction of -35 dB equivalent to wearing mufflers
- ✓ 1 to 5 mm of thickness is enough to get -35 dB

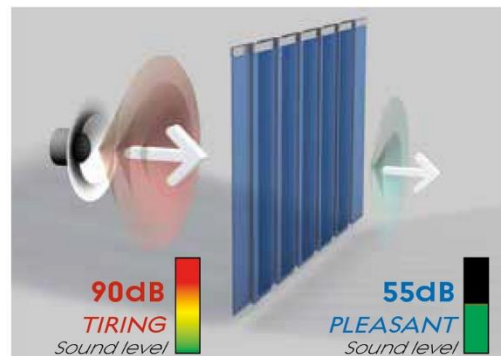


## /// THE BEST SOLUTION FOR THERMAL INSULATION

Flexible vinyl is an advantage in your building.

Insulation and energy gain are greater than with all plastics (except polystyrene).

- ✓ Excellent thermal conductivity ( $\lambda$ ) and resistance ( $R$ ) (similar to characteristics of wood):  
 $\lambda = 0,16 \text{ W.m}^{-1}.\text{°C}^{-1}$   
 $R = 30 \text{ m}^2.\text{°C.W}^{-1}$  (5mm d'épaisseur)
- ✓ Simple installation: thin, flexible material easy to install
- ✓ Transparency for a secure installation and creation of insulating partitions

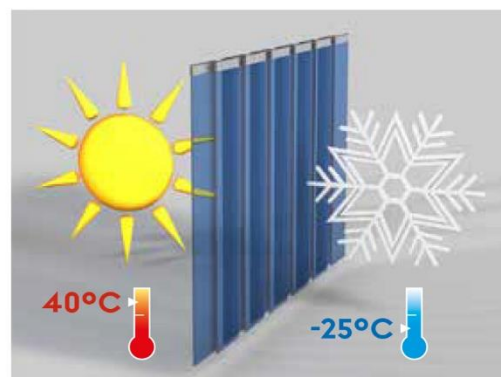

**GUILLAUME TEISSEDE** – ENGINEER AND HEAD OF THE R&D SERVICE, GIVES US HIS EXPERT APPRAISAL:

"FLEXIBLE VINYL IS ONE OF THE RARE PLASTIC MATERIALS THAT CAN BE FORMULATED TO CONFER THE DESIRED PROPERTIES TO IT. BOTH EXTRUDER AND COMPOUNDER, THE EXTRUFLEX TECHNICAL TEAM TRIES TO MEET AND OFFER THE BEST SOLUTIONS TO OUR CUSTOMERS' SPECIFICATIONS."




# FOCUS ON

## PLASTIC MATERIALS & EARTH'S ENERGY RESOURCES

Like any products, plastic materials have impacts on earth's energy resources. To assess those impacts, plastics eco-profile studies use the gross energy required to produce them. It includes all gross primary fuels used as energy or raw materials and all other energy resources consumed all along the production process (from earth's resources extraction to plastics resins or compounds production).

Plastic materials have very different gross energy requirements, leading to very different impacts on earth's resources. Making the right material choice has become essential in a context where earth's energy resources need to be carefully controlled.

Extruflex help to make the right material choice to save and preserve earth's natural resources.

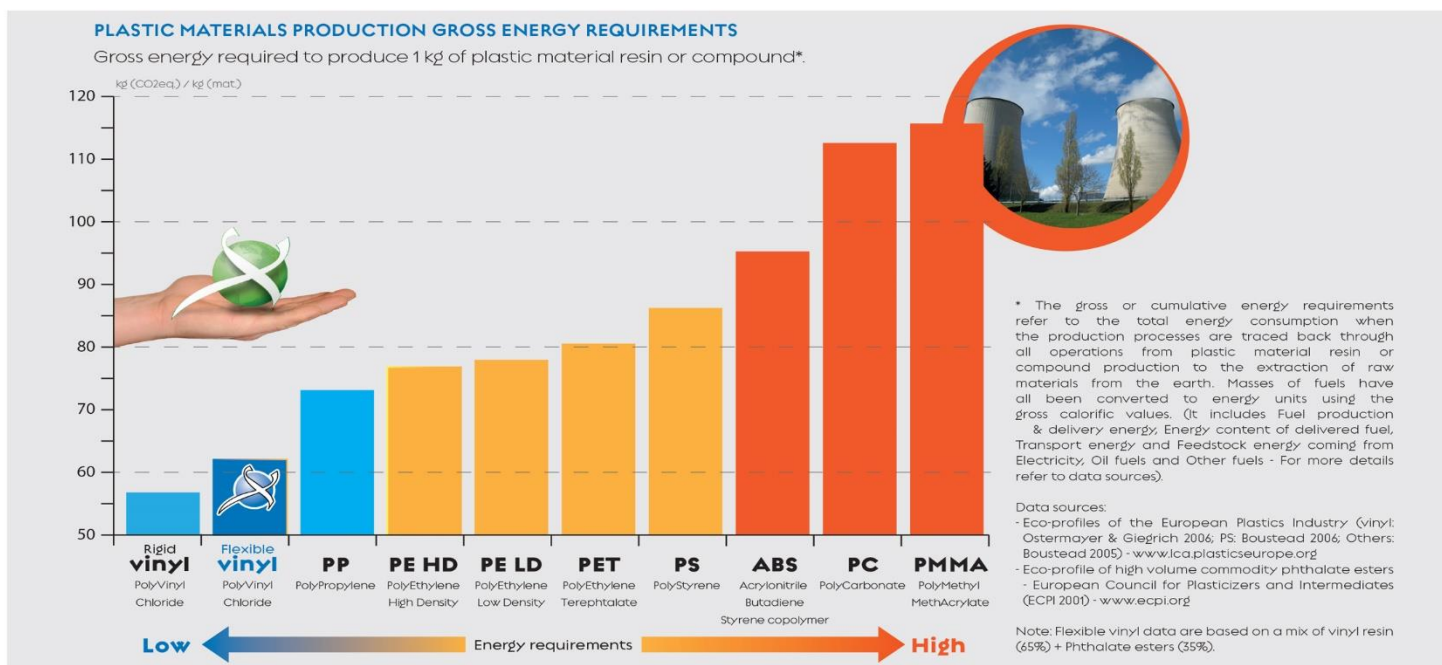

Plastics which use high levels of energy are often used in order to make more profits to the detriment of environment and earth's resources. Such practices have contribute to degrade the image of plastics in the public opinion instead that low production energy requirements plastics such as flexible PVC are earth's resources respectful and environmental friendly.

Due to its very low production energy requirements and its highly efficient applications, such as strong thermal insulation,

Extruflex flexible vinyl strips & sheets save and preserve earth's natural resources and environment.

ENVIRONMENT & SAFETY




# FOCUS ON

## PLASTIC MATERIALS & GLOBAL WARMING

Like any products, plastic materials have impacts on earth's global warming and environment. To assess those impacts, plastics eco-profile studies use the carbon dioxide equivalents or global warming potential of the gases emitted all along the production process (from earth's resources extraction to plastics resins or compounds production).

Gas emissions can be very different according to the plastic material produced, leading to very different impacts on earth's global warming and environment. Make the right material choice has become essential in a context where earth is warming faster and faster to levels never met before and needs to be saved and preserved urgently.

✓ **Extruflex** help to make the right material choice to save and preserve earth.

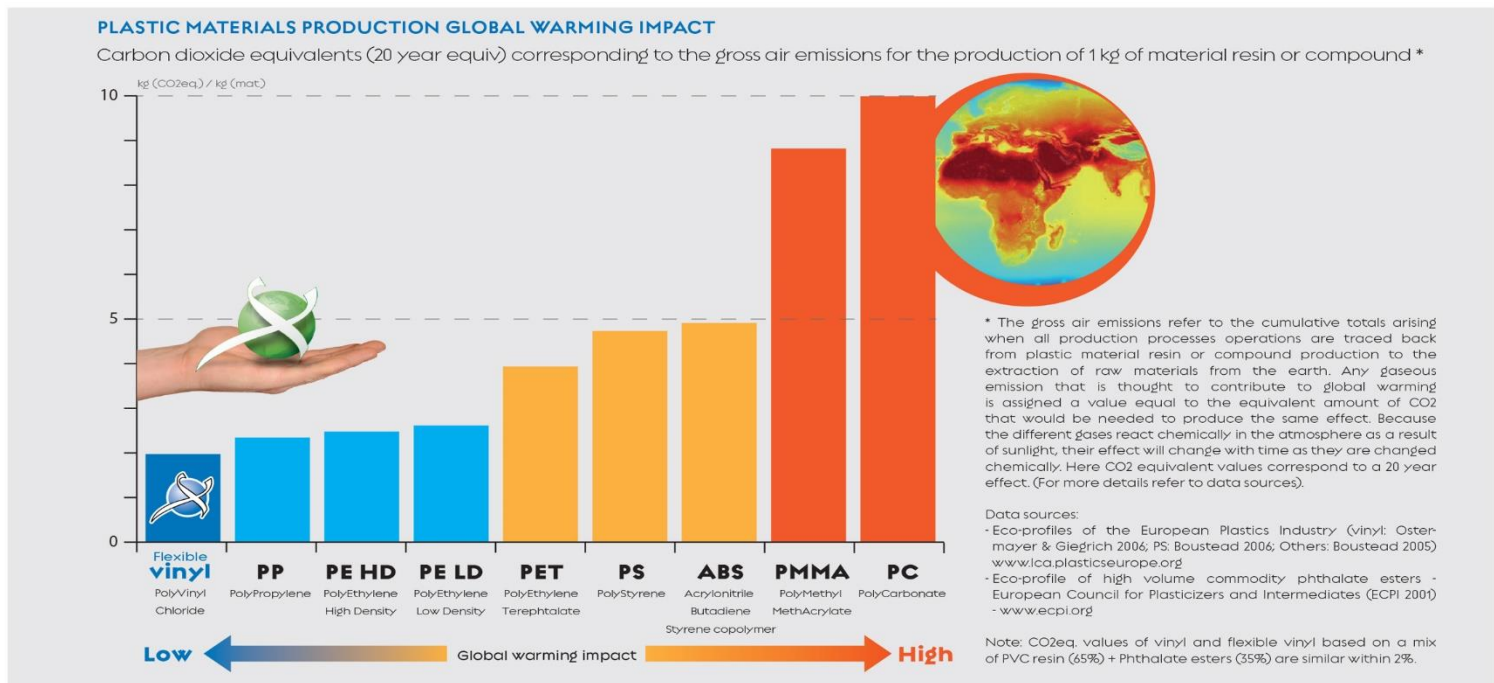

High global warming impact plastics are often used in order to make more profits to the detriment of environment. Such practices have contributed to degrade the image of plastics in the public opinion instead that low global warming impact plastics such as flexible PVC are safe and environmental friendly.

Due to its very low global warming potential air emissions and its highly efficient applications, such as strong thermal insulation,

✓ **Extruflex** flexible vinyl strips & sheets save and preserve earth's natural resources and environment.

**ENVIRONMENT & SAFETY**

# FOCUS ON

## PLASTIC MATERIALS & OIL RESSOURCES


Most plastic materials are derived from oil. Oil offers an extraordinary range of possibilities as to its use. This precious resource has been abusively exploited for many years, making earth's reserves run low. Nowadays it is essential to save and preserve this resource by using it respectfully at its fair value.

43% of vinyl resin is made from petroleum products and 57% from salt products. Salt is for over half of its weight, a resource available in abundance on earth (sea water), flexible vinyl is among the plastic materials consuming less oil resources. Flexible vinyl contributes to save and preserve earth's oil resources by using it efficiently and respectfully.

✓ **Extruflex** help to make the right material choice to save and preserve earth's natural resources.

### PLASTIC MATERIALS PRODUCTION OIL CONSUMPTION

Gross energy required to produce 1 kg of plastic material resin or compound \*.

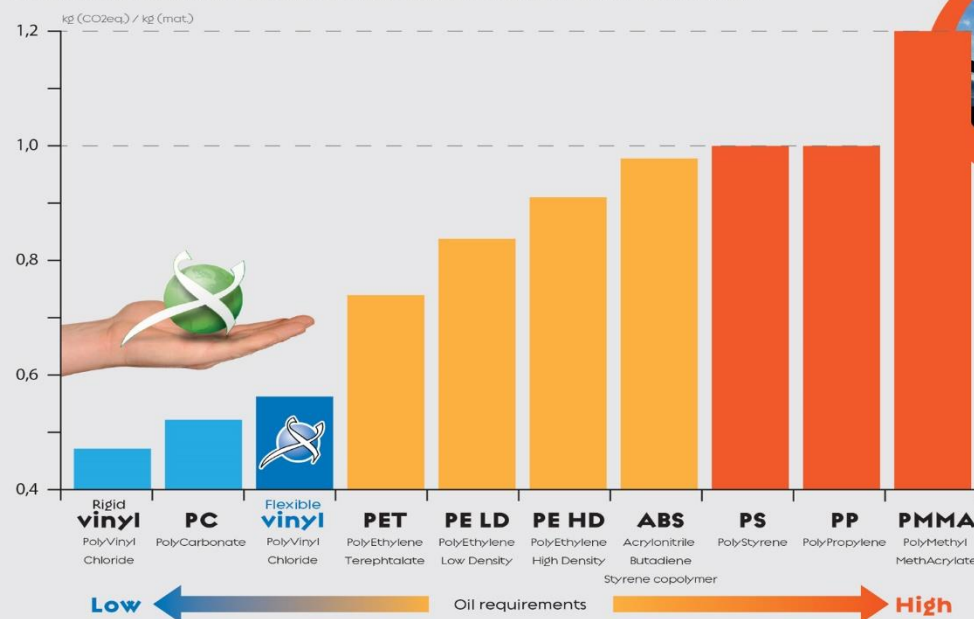

\* Total crude oil requirements refer to the total crude oil consumption when the production material resin or compound production to raw materials extraction from earth. (It includes fuel, Transport and Feedstock - For more details refer to data sources).

Data sources:

- Eco-profiles of the European Plastics Industry (vinyl: Ostermayer & Giegrich 2006; PS: Boustead 2006; Others Boustead 2005) - [www.icaplasticseurope.org](http://www.icaplasticseurope.org)  
- Eco-profile of high volume commodity phthalate esters European Council for Plasticizers and Intermediates (ECPI 2001) - [www.ecpi.org](http://www.ecpi.org)

Note: Flexible vinyl data are based on a mix of vinyl resin (65%) + Phthalate esters (35%).

Oil greedy plastics are often used in order to make more profits to the detriment of environment and earth natural resources. Such practices have contribute to degrade the image of plastics in the public opinion instead that low oil requirements plastics such as flexible vinyl are earth natural resources respectful and environmental friendly.

By efficiently using low oil quantity for highly efficient application such as thermal insulation, **Extruflex** flexible vinyl strips & sheets contribute to save and preserve earth natural resources.

✓ **Extruflex** flexible vinyl strips & sheets save and preserve earth's natural resources and environment.

ENVIRONMENT & SAFETY



Levallois-Perret, 17 September 2008,

To whom it may concern

**CERTIFICATE****HYGIENE OF FOODSTUFFS**

All **extruflex** flexible PVC strips and sheets (except anti-static references (Ref. 180) which is moisture absorbent as mentioned on its label) can be used as floor surface, wall surface, ceiling or door in rooms where food is prepared, treated or processed, including rooms contained in means of transport.

This smooth surface, non-absorbent, impervious, washable and non-toxic material is easy to clean and to disinfect. It meets the requirements enounced by the regulation (CE) n° 852/2004 of the European parliament and of the council of 29 April 2004 in reserve to be correctly implemented.

Thank you for your concern and support to our environmental and safety policy.



Jacques VALAT  
Chief Executive Officer

Levallois-Perret, 17 September 2008,

To whom it may concern

**CERTIFICATE**

**SILICONE FREE PRODUCTS**

**extruflex** flexible PVC strip and sheet products do not contain silicone.

This does not mean that this substance may not be found in our products in extremely low quantities, without toxicological or regulatory significance.

**extruflex** can in no way be held responsible if the product is contaminated by other products it may come in to contact with after the goods are dispatched.

Thank you for your concern and support to our environmental and safety policy.



Jacques VALAT  
Chief Executive Officer





Racing ahead for safety and environment

## extruflex FLEXIBLE PVC TECHNICAL SPECIFICATIONS

### - DESCRIPTIONS -

PROPERTY	Standard	Description
Light transmittance	ASTM D 1003	Visible light rate transmitted through the material.
Shore A hardness	EN ISO 868	Index based on a flat indenter's penetration depth. Scale from 0 (Soft) to 100 (Hard).
Tearing resistance	DIN 53515	Minimum tensile stress required to tear a pre-slit sample.
Tensile strength at break	ASTM D 638	Maximum tensile stress that a material can be subjected to before break.
Elongation at break	EN ISO 527	Elongation of the specimen at the break point under tensile stress.
Residual elong. (after break)		Permanent elongation of the specimen measured after rupture in a tensile test.
Thermal conductivity	ASTM C 177	Ability to conduct heat. The Lower it is, the more insulation.
Cold bend brittle temp.	ISO 8570	Temperature at which the specimen break under torsion stress. Brittle point (CLASH & BERG).
Min. usage temp.	EN 1876	Temperature range where material keep its mechanical properties (flexibility).
Max. usage temp.		
Vicat softening temp.	EN ISO 306	Temperature at which the specimen is penetrated to a depth of 1 mm by a 1 kg flat indenter of 1 sq. mm.
Specific heat capacity	ISO 11357	Heat energy required to increase the temperature of one kilogram of the material by one degree Celsius.
Sound reduction	DIN 52210	Average sound level (freq. 0,1 to 3,2 kHz) decreased by a 1,76 sq.m. and 5 mm thick PVC curtain.
Reaction to fire	NF P 92-507 AS/NZS 3837 DIN 4102	Standard classifications of material self-extinguishing and resistance to combustion.
UV/IR filter	EN 1598	Ability to filter welding rays allowing the use of this material as a welding protection screen.
UV resistance	ISO 4892	Ability to resist to UV (Sun, welding arc).
Charge buildup	IEC 61087	Earthed sample is rubbed with cotton, acrylic and nylon rubbers. At electrode approach, spark appears or doesn't.
Surface resistivity	IEC 60093	Material surface electric resistivity measured with a 500 V direct voltage.
Water absorption	EN ISO 62	Material mass variation after exposure to humid conditions. (<0 if released / >0 if absorbed)
Anti-insect	-	Special ability to keep insects away. (Food processing plants, tropical regions)
Density	ASTM D 792	Mass per unit volume.

*The data contained in this technical specification is given for information only and is based on our current knowledge of the products concerned.*

*This information given to our customer in good faith to inform him and to help him in his search, does not constitute any formal or implicit guarantees as to its use.*